PYROLO

Perfect for use over thermally protective and arc protective clothing!

LAKELAND **DISPOSABLE / CHEMICAL PP**

Pyrolon[®] Plus 2 Applications Dirt, Oil and Greas Hazardous Dry Particulates Flammable Environment


- Second generation Pyrolon[®] Plus 2 offers wet or dry strength superior to that provided by other traditional Flame Resistant disposables
- Meets the NFPA 2113 requirements for section 5.1.9.
- ANSI/ISEA 203 Certified
- Pyrolon® Plus 2 is breathable, making this a cool and comfortable garment to wear.


Pyrolon® Plus 2 can be used in work environments where hazardous or non-hazardous contaminants may be present.

Pyrolon® Plus 2 is certified to the ANSI/ISEA 203-2018 American National Standard for Secondary Single-Use Flame Resistant Protective Clothing for Use Over Primary Flame Resistant Protective Clothing.

Pyrolon® Plus 2 Physical Properties

| Physical Property | Test Method | Units | Test Results |
|---------------------|-------------|------------|-----------------------|
| Basis Weight | ASTM D3776 | oz./sq. yd | 2.4 oz/y ² |
| Grab Tensile MD | ASTM D5034 | lbs. | 31.0 lbs. |
| Grab Tensile XD | ASTM D5034 | lbs. | 20.0 lbs. |
| Trapezoidal Tear MD | ASTM D5733 | lbs. | 4.5 lbs. |
| Trapezoidal Tear CD | ASTM D5733 | lbs. | 5.6 lbs. |
| Air Permeability | ASTM D737 | cfm | 52 cfm |
| Char Length MD | ASTM D6413 | inches | 3.70 inches |
| Char Length XD | ASTM D6413 | inches | 3.70 inches |
| Ignition Point | _ | degrees F | 1000° F |
| Surface Resistance | EN1149 | Ω | Pass |
| | | | |

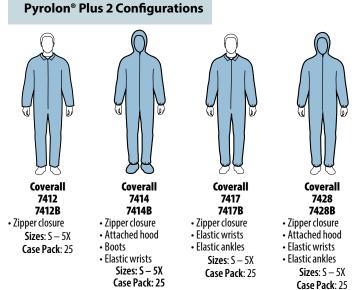



 Snap closure • 2 pockets Long sleeve Sizes: S - 5X Case Pack: 30



7713B Elastic face Covers shoulders One size Available in Blue only Case Pack: 250



• 17" high Available in Blue only Sizes: S/M, L/XL, 2X Case Pack: 200 pair



Pyrolon[®] Plus2 coveralls and lab coats are available in White or Blue. For Blue, add an "B" to the end of the style number